





Embark on your digital transformation journey

Designed to accelerate your digital transformation (DX) journey, new Apeos series with its smart and seamless integration features present itself as a trusted digital partner.











True scalable solutions to start your digital journey



Apeos C2061 / C2561

Offering Scalability

Promote easier collaboration and enhanced accessibility with paperless office solutions.

Designing Simplicity

Designed for all, our devices deliver ease of use, accessibility and personalisation features for a true intuitive experience.

Creating Environmental Sensitivity

Driving organisation awareness towards creating a low impact environment with advance features such as low melting point (low energy) toner technology, smart power-saving sensors or staple-free finishing.







Make an impression with every print

Newly developed toner produces exceptional colours in every tone and shade, while high resolution of 1,200 x 2,400 dpi delivers precise lines and text, giving every print a professional look.



Designing simplicity for everyday business needs

Small footprint fits in every office space

The compact design with width of 577 mm and depth of 659 mm* fits everywhere, including tight spaces, maximising office space utilisation.

* For 1 Tray standard configuration.

Produce promotional materials in-house and on-demand

Supports wide range of paper size and weight*1, giving you the flexibility to personalise and print on envelope, direct mail, posters, promotional banners, or even long POP displays*2.

- *1: Paper weight from 52 to 300 gsm *2: Long sheets up to 297 x 1,200 mm



Easy-to-use, 7-inch control panel

Effortless and intuitive operation at the touch of your finger

The home screen allows individual user to customise frequently used app buttons and arrangement based on individual preference. Frequently used settings can be "pinned" for easy access on daily basis.

Additionally, you can connect your mobile devices through QR code scanning or NFC to Copy, Fax*1, Print and Scan*2 jobs using the Print Utility*3 application.

- *2: Scan to Mobile, E-mail, Scan to Folder.
 *3: Connect to the machine via wireless environment or Wi-Fi Direct connection. It can be downloaded free of charge from Google

Play™ or App Store.

Note: AirPrint, Mopria® Print Service, and Mopria Scan are supported for printing or scanning by using a mobile device.





Promotes DX and collaboration with paperless office solutions

Quick digitisation of high-volume originals

1 pass, 2-sided scanning of up to 80 ppm

The high-speed 1-pass, 2-sided scanning Automatic Document Feeder holds up to 130 sheets* and scans 2-sided document in one go, allowing you to digitise large documents swiftly and effortlessly.

Note: Installed for Model-CPS-B as standard. * 70 gsm



The large grip width makes it easier to lift the automatic document feeder.

- Supports scanning of small-size documents (49 x 85 mm), thick cheques and thin paper receipts (38 to 128 gsm).
- Scanned documents can be transferred to e-mail, PC, or shared servers
- Supports multi-sending, such as saving a copy to your PC while sending an e-mail to a client in a single scan.

Simple scanning to yourself

With ScanAuto, the pre-installed multifunction printer add-on application, you can easily send scanned data with a touch of a button and the multifunction printer will automatically select scan settings (such as document orientation, 1-sided or 2-sided) that are suitable for the document.

File names can be assigned from presets on the UI screen, ensuring scanned files will not get lost on the PC.

Note: The destination can be selected from Scan (Email) or Scan (to PC)



Streamline operations with paperless fax*

Preview before print to reduce wastage

Content of received fax can be previewed on the control panel before printing, allowing you to delete unwanted documents such as unsolicited faxes and print only what is necessary to avoid paper wastage.

Don't miss important faxes, whether you are in the office or on the move

Faxes received can also be forwarded by e-mail, allowing you to check the content even when you are away from office.

* Optional



Automate the tedious task of fax sorting with Paperless Fax Delivery*

By using Paperless Fax Delivery*, faxed documents can be automatically sorted and forwarded without printing. Manual sorting and organising of received documents are eliminated as they are automatically sorted into folders based on information such as fax number, received date and preregistered names in multifunction printer's address book.

*Optional

Digitisation of paper documents for effortless document management

Scan Delivery Light* reduces your scanning workload by simplifying complicated and repetitive scanning workflow.

Standard rules and templates can be created easily, allowing you to complete multiple actions (scan settings, storage destination designation and file renaming) with a single touch.

Scanned information can also be managed and utilised centrally, improving productivity and resource optimisation.

* Optiona

Scan Delivery Light



Safeguarding your DX journey with market-leading security

As network connected information devices, the multifunction printer is equipped with state-of-the-art security features to protect your valuable information assets from cyber-attacks and rapidly evolving security threats.

Protect from unauthorised user

- Unauthorised operations and access are prevented by user authentication and usage restrictions.
- Expansion with Secondary Ethernet* allows a single multifunction printer to be used on a separated network, etc.

Protects Data

- Encryption of communication paths with TLS and IPsec
- Protection of scanned files and e-mails through encryption/ electronic signatures
- Data writing to SSD is encrypted with robust AES-256 encryption, etc.

Protect from unauthorised access

- Account lock function
- Restriction of accessible IP addresses
- Prevention of software tampering during multifunction printer startup and operation
- Automatic repair function upon detection of tampering at startup, etc.

Prevent information leaks due to operational errors

- Fixing the delivery destination of scanned documents
- Double input of fax destinations, etc.

The multifunction printers of the future

FUJIFILM Business Innovation aims to address environmental issues through climate change mitigation and resource circulation efforts in our business activities. Our products are developed with unique innovations and technologies that balances environmental impact reduction and usability.

New toner and a fusing unit with low fixing temperature and high image quality

Adopted a new toner and a fusing unit that enable reducing power consumption during toner fixing, the most power-consuming process in multifunction printers.

By using functional resin, our newly developed toner has achieved industry-leading low fixing temperature $^{\star 1}$ that is 15 degrees lower than the toner used in previous models $^{\star 2}.$

In addition, the adoption of a new fixing unit achieved both low fixing temperature and exceptional image quality.

- *1: As of July 2024, according to our survey. *2: Toner used in the Apeos C3060 / C2560 / C2060.

Designed for now and for the future

In the effort to promote recycling of resources, recycled plastic materials are used* for parts such as the front cover and trays. We have overcome challenges to devise ways to suppress uneven color of the appearance of recycled plastic, which is said to be difficult to mold. And by improving the strength and rigidity of the parts, we ensure the quality of the product

Furthermore, our products have been redesigned to allow easy disassembly and cleaning, making them easy to reuse and recycle in the future.

* In the case of 4 Tray configuration with Duplex Automatic Document Feeder. 15 % of the total plastic weight of the device is recycled material.

Technologies for energy conservation

- Less energy and compact with high resolution printing on LED
- Saves energy with quick startup and smart power saving feature that solely powers on the required parts according to the functions being

Contributing to smaller CO₂ emission with lightweight body

By optimising resin and sheet metal with thinning technology and revising the frame structure, we have achieved a reduction in body weight by 10 %* while maintaining the strength and contributing to CO₂ emissions reduction in logistics.

For Model-CPS-ST with 4 Tray configuration. Compared to the previous model Apeos C3060 / C2560 / C2060 Model-CPS with 4 Tray configuration, including toner.

Reliable support system

Easy solutions to resolve problems

From supplies replacement to unexpected device failures, most problems can be resolved without waiting for the service representatives or sales

1. Resolve problem using the "Help" function on the device

- Self Help information is available on the control panel
- Self Help information can be accessed via the mobile device by scanning the QR code displayed on the control panel

2. "Remote Assistance" with the help of operators

- Connects directly to the Support Centre
- An operator will remotely access the multifunction device to resolve the problem by guiding through the steps on the shared control panel

Keeping a close eye on your multifunction device on a daily basis

Connecting your multifunction printer to our EP service* via the internet allows for checking of billing meter, automatic delivery of consumables when cartridges level is low, daily status monitoring, and machine error detection for early intervention to rectify problem. This minimises operation downtime and reduces administrator's burden.

Note: The content of the services provided may vary depending on the usage region. For

details, please contact one of our sales representative

* You need to apply for using the EP service. (free of charge)

Device Setup Editor

Device Setup Editor is a service that always backs up the latest setting information to a cloud server. It allows you to be prepared for unexpected situations and use your multifunction printer with confidence.





Note: You need to apply for using the Device Setup Editor. (free of charge).

Set up and manage remote multifunction printers from the **Remote Operation Panel**

By launching the Remote Operation Panel from a web browser, the multifunction printer's control panel can be displayed to and operated from a PC. By logging into Administrator Mode, the system administrator can manage multifunction printers at remote business locations within

Note: Within the same intranet. While the Remote Operation Panel is active, the multifunction printer's control panel cannot be operated. Additionally, the Remote Operation Pane cannot be launched while the user is operating the multifunction printer.

Apeos C2561/1T / C2061/4T Functions & Specifications

Basic Specifications / Copy Function

	Basic Specifications / Copy Function				
Item		C2561/1T C2061/4T			
Туре		Desktop / Console			
Memory C	Capacity	4 GB (Max: 4 GB)			
Storage Device Capacity*1		Model-CPS-B: 256 GB 3.6 GB (Optional: 256 GB) *2 GB) *2			
Colour Ca	pability	Full Colour			
Scan Resc	lution	600 x 600 dpi			
Printing R		1,200 x 2,400 dpi			
Warm-up	Time*3	[Embedded Plug-ins / Custom Services] ** When enabled: 26 seconds or less (23 degrees Celsius room temperature When disabled: 22 seconds or less (23 degrees Celsius room temperature			
Recovery (Recovery	Time Time from	13.6 seconds or less (23 degrees Celsius (23 degrees Celsius (23 degrees Celsius room temperature)			
Sleep Mod	de)	room temperature)			
Original Si	ze	Maximum of A3, 11 x 17", 297 x 432 mm for both Sheet and Book			
	Tray 1	Max: A3, 11 x 17", Min: A5 SEF, Envelope* ⁵ , Postcard (100 x 148 mm) Custom Size: 90 x 98 mm to 297 x 432 mm			
Paper	Tray 2, 3, 4	Max: A3, 11 x 17", Min: A5 SEF Custom Size: 140 x 182 mm to 297 x 432 mm			
Size	Bypass Tray	Max: A3, 11 x 17", Min: A5 SEF, Envelope* ⁶ , Postcard (100 x 148 mm) Custom Size: 89 x 98 mm to 297 x 432 mm			
	Image loss width*7	Lead edge 4.0 mm, Trail edge 2.0 mm, Right / Left edge 2.0 mm			
Paper	Paper Tray	52 to 300 gsm			
Weight*8	Bypass Tray	52 to 300 gsm			
First Copy	B/W*9	4.6 sec. 5.9 sec.			
Output Time	Colour*10	6.0 sec. 7.9 sec.			
	A4 LEF / JIS B5 LEF	B/W: 25 ppm B/W: 20 ppm Colour: 25 ppm Colour: 20 ppm			
Continuous	A4	B/W: 19 ppm B/W: 16 ppm Colour: 19 ppm Colour: 16 ppm			
Copy Speed*11	JIS B5	B/W: 14 ppm B/W: 11 ppm Colour: 14 ppm Colour: 11 ppm			
Speed	JIS B4	B/W: 16 ppm B/W: 13 ppm Colour: 16 ppm Colour: 13 ppm			
	А3	B/W: 14 ppm B/W: 11 ppm Colour: 14 ppm Colour: 11 ppm			
	Standard	520 sheets x 1-tray + Bypass Tray 96 sheets			
Paper Tray Capacity*12	Optional	1 Tray Module / 1 Tray Module with Cabinet: 520 sheets x 1-tray 3 Tray Module: 520 sheets x 3-tray			
	Max	2,176 sheets [Standard + 3 Tray Module]			
Output Tray Capacity*13		[Model-CPS-B] Upper Center: 250 sheets (A4 LEF) *1· (A4 LEF), Lower Center: 250 sheets (A4 LEF) (A4 LEF) (A4 LEF) *1· (Model-CPS-ST] 400 sheets (A4 LEF) *1·			
Power Sup	oply	AC220-240 V +/- 10 %, 8 A, 50/60 Hz common			
Maximum Power Consumption		1.76 kW (AC220 V +/- 10 %), 1.92 kW (AC240 V +/- 10 %) Sleep Mode: 0.3 W (AC230 V +/- 10 %) Low Power Mode: 43 W (AC230 V +/- 10 %) Ready Mode: 66 W (AC230 V +/- 10 %)			
Dimensions		$\label{eq:model-CPS-B:} W 577 \times D 659 \times H 775 \ mm \\ W 577 \times D 659 \times H 878 \ mm \ (when optional 1 \\ Tray Module is installed.) W 587 \times D 659 \times H 1,126 \ mm \ (when optional 1 \\ Tray Module with Cabinet is installed.) W 587 \times D 659 \times H 1,126 \ mm \ (when optional 3 \\ Tray Module is installed.) W 587 \times D 659 \times H 1,126 \ mm \ (when optional 3 \\ Tray Module is installed.) W 577 \times D 659 \times H 769 \ mm \\ W 577 \times D 659 \times H 769 \ mm \\ W 577 \times D 659 \times H 769 \ mm \\ W 577 \times D 659 \times H 1,120 \ mm \ (when optional 1 \\ Tray Module is installed.) W 587 \times D 659 \times H 1,120 \ mm \ (when optional 1 \\ Tray Module is installed.) W 587 \times D 659 \times H 1,120 \ mm \ (when optional 1 \\ Tray Module with Cabinet is installed.) \\ W 587 \times D 659 \times H 1,120 \ mm \ (when optional 1 \\ Tray Module is installed.) \\ W 587 \times D 659 \times H 1,120 \ mm \ (when optional 3 \\ Tray Module is installed.) \\$			
Weight*15		60 kg 75 kg (when optional 1 Tray Module is installed.) 81 kg (when optional 1 Tray Module with Cabinet is installed.) 83 kg (when optional 3 Tray Module is installed.)			

*1: Storage Device Capacity is not totally available for customers. *2: When the optional Storage (SSD) is installed. *3: It may change depending on usage conditions. *4: Embedded Plug-ins / Custom Services are enabled as factory default. *5: Supported standard envelope sizes are Commercial#10, Monarch 7 3/4, DL, ISO-C4, etc. *6: Supported standard envelope sizes are ISO-C4 and ISO-C5. *7: Up to A3 size. *8: It is recommended to use our recommended paper. Correct print output may not be possible depending on the requirement. *9: A4 LEF / Monochrome priority mode. *10: A4 LEF / Colour priority mode. *11: The speed may be reduced due to the image quality adjustment. *12: 80 gsm paper. *13: 70 gsm paper. *14: When installing the optional Exit 2 Tray, the Center Tray capacity is 250 sheets (A4 LEF), and the Exit 2 Tray capacity is 250 sheets (A4 LEF). *15: Excluding Toner Cartridge.

Print Function

ltem		Description	
Туре		Built-in type	
	Tray 1	Same as the Basic Specifications / Copy Function	
	Tray 2, 3, 4	Same as the Basic Specifications / Copy Function	
Print Size	Bypass Tray	Max: A3, 11 x 17", Min: A5 SEF, Envelope*1, Postcard (100 x 148 mm) Custom Size: 89 x 98 mm to 297 x 1,200 mm*2	
	Image loss width*3	Lead edge 4.0 mm, Trail edge 2.0 mm, Right / Left edge 2.0 mm	
Continuou Speed*4	ıs Print	Same as the Basic Specifications / Copy Function	
Printing	Standard	[PCL Driver] Standard: 1,200 x 2,400 dpi, High Quality: 1,200 x 2,400 dpi, High Resolution: 1,200 x 1,200 dpi	
Resolution	Optional	[Adobe® PostScript® 3™ Driver] High Speed (Standard): 600 x 600 dpi, High Quality: 1,200 x 2,400 dpi, High Resolution: 1,200 x 1,200 dpi	
Page	Standard	PCL5 / PCL6	
Description Language	Optional	Adobe® PostScript® 3™	
Supported Operating System*5	Standard	[PCL Driver] Windows 11 (64 bit), Windows 10 (32/64 bit) Windows Server 2022 (64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit) [Mac OS X Driver] macOS 14/13/12/11/10.15	
	Optional	[Adobe® PostScript® 3™ Driver] Windows 11 (64 bit), Windows 10 (32/64 bit) Windows Server 2022 (64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit) macOS 14 / 13 / 12 / 11 / 10.15	
Interface	Standard	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T, USB3.0	
interrace	Optional	Wireless LAN (IEEE 802.11a / b / g / n / ac)	

*1: Supported standard envelope sizes are Commercial#10, Monarch 7 3/4, DL, ISO-C4, etc.
*2: Long paper of 106 to 220 gsm (Extra Heavyweight) is available. The printed papers are delivered to the Side Tray when Finisher-A3 is attached. *3: Up to A3 size. *4: The speed may be reduced due to the image quality adjustment. The printing speed may be reduced depending on the document. *5: Please refer to our official website for the latest supported OS.

Scan Function

Item		Description
Туре		Colour Scanner
Scan Resolution		600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi
Scan Speed		Same as the Scan Speed for the Duplex Automatic Document Feeder
1-46	Standard	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T
Interface	Optional	Wireless LAN (IEEE 802.11a / b / g / n / ac)

Fax Function (Optional)

Item	Description	
Original Size	Max: A3, 11 x 17", Long document (Longest 600 mm*1)	
Recording Paper Size	Max: A3, 11 x 17"; Min: A5	
Transmission Time	2 seconds and more but fewer than 3 seconds*2	
Transmission Mode	ITU-T G3	
Applicable Lines	Telephone subscriber line, PBX, Fax communication (PSTN), Maximum 3	

*1: When Duplex Automatic Document Feeder is used. *2: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 x 3.85 lines/mm) and in high-speed mode (28.8 kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition. *3: No. of FAX lines is up to 3 ports. Port refers to number of channels for FAX.

Duplex Automatic Document Feeder B1-C

Duplex Automatic Document receder B1 C				
Item		C3061	C2561	C2061
Original Size*1/		Max: A3, 11 x 17"; Min: A6		
Paper Weight		38 to 128 gsm (In Duplex: 50 to 128 gsm)		
Capacity*2		110 sheets		
	Copy (A4	B/W: 30 ppm	B/W: 25 ppm	B/W: 20 ppm
Scan	LEF, Simplex)	Colour: 30 ppm	Colour: 25 ppm	Colour: 20 ppm
Speed*3	Scan	B/W: 55 ppm, Colour: 55 ppm		

Note: Installed for Model-CPS-ST as standard. ± 1 : Custom Size is 125 x 85 mm to 297 x 432 mm. ± 2 : 70 gsm paper. ± 3 : The scanning speed varies depending on the documents.

Duplex Automatic Document Feeder B4-PC

Item C306		C3061	C2561	
Original Size*1 / Max: A3, 11 x 17"; Min: A6 Paper Weight 38 to 128 gsm (In Duplex: 50 to 128 gsm)*2				
Capacity*3 130 sheets				
6		B/W: 30 ppm Colour: 30 ppm	B/W: 25 ppm Colour: 25 ppm	
Scan Speed* ⁴	Scan	B/W: 80 ppm, Colour: 80 ppm (1 pass, 2 sided scanning: B/W 80 ppm, Colour 80 ppm) [Standard Document (A4 LEF), 200 dpi, to Folder]		

Note: Installed for Model-CPS-B as standard. *1: Custom Size is 49 x 85 mm to 297 x 432 mm. *2: Custom Sizes from 49 x 85 mm to 55 x 91 mm are available from 38 to 209 gsm. *3: 70 gsm paper. *4: The scanning speed varies depending on the documents.

Side Tray (Optional)

Item	Description
Paper Capacity*	100 sheets
Dimensions / Weight	W 328 x D 540 x H 198 mm, 3 kg

^{* 70} gsm paper.


Notes

- 1) If the storage media of the base unit fail, loss of received data, accumulated data, registered setting data, etc. may occur. In no event shall "the company" be liable for any damages whatsoever arising from loss of data.
- Functional spare parts will be available for at least 7 years after the product is no longer manufactured.

Einicher A2 (Ontional)

Finisher-A3 (Optional)				
Item		Description		
T	Center Tray	Stack		
Туре	Finishing Tray	Sort (Offset available*1*2) / Stack (Offset available*1*2)		
D	Center Tray	A4, A3		
Paper Size	Finishing Tray	Max: A3, 11 x 17"; Min: A6, Postcard (100 x 148 mm) Custom Size: 89 x 98 mm to 297 x 432 mm		
Paper	Center Tray	52 to 300 gsm		
Weight	Finishing Tray	52 to 256 gsm		
	Center Tray	A4 LEF: 125 sheets; A4 SEF, A3: 50 sheets		
Paper Capacity* ³	Finishing Tray	[Without Stapling] A4 LEF: 500 sheets; JIS B4: 250 sheets; A3 or larger: 200 sheets; Mixed Size Stacking**: 250 sheets [With Stapling] A4 LEF: 30 sets or 500 sheets; JIS B4: 250 sheets; A3 or larger: 200 sheets; Mixed Size Stacking**: 250 sheets		
	Capacity	A4: 50 sheets (90 gsm or less), JIS B4 or larger: 30 sheets (90 gsm or less)		
Staple	Paper Size	Max: A3, 11 x 17"; Min: JIS B5 LEF Custom Size: 203 x 182 mm to 297 x 432 mm		
	Paper Weight	52 to 256 gsm		
	Position	Single stapling, Dual stapling		
Dimensions / Weight		W 465 x D 484 x H 248 mm, 10 kg		

^{*1: [}No Offset] is selected by factory default. *2: Outputs less than 190 mm width are delivered without offset stacking. *3: 70 gsm paper. *4: When larger size sheets are stacked on top of smaller size sheets: 250 sheets (when large size sheets are smaller than A3) / 200 sheets (when large size sheets are A3 or larger). The same applies to when staple-free and stapled bindings are mixed or different stapling positions are mixed.

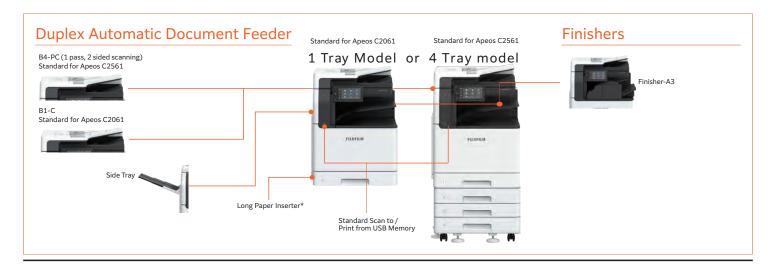



FUJIFILM Business Innovation New Zealand Limited

10-12 Landing Drive, Mangere, Auckland 2022, New Zealand Tel. 0800 493 769

fujifilm.com/fbnz

 $\hbox{FUJIFILM Business Innovation aims to address environmental issues through climate change mitigation and}$

 $The \ available \ model \ varies \ depending \ on \ the \ country/region. \ Please \ ask \ the \ sales \ representatives \ for \ details.$ The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law: •Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. •Unused postage stamps, post cards, etc. •Certificate stamps stipulated by law. •Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

personal use, family use or other similar uses within a limited circle.

Trademarks -FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation.

Apeos, DocuWorks, Working Folder, and Cloud Service Hub are registered trademarks or trademarks of

FUJIFILM Business Innovation Corp.

-Microsoft, Active Directory, Azure, Microsoft Entra, Microsoft Edge, Excel, OneDrive, PowerPoint, SharePoint,
Microsoft, Earms, Windows, and Windows Server are registered trademarks of US Microsoft Corporation in
the U.S. and other countries. Apple, Mac, macOS, OS X, AirPrint, and AirPrint logo are trademarks of Apple
Inc. registered in the U.S. and other countries and regions. Adobe, Adobe logo, PostScript, and PostScript logo
are either registered trademarks or trademarks of Adobe in the United States and/or other countries. Mopria,
the Mopria Logo, and the Mopria Alliance word mark and logo are registered and/or unregistered trademarks
and service marks of Mopria Alliance, Inc. in the United States and other countries. QR Code is a registered
trademark of DENSO WAVE INCORPORATED. All product names and company names mentioned in this
brochure are trademarks or registered trademarks of their respective companies.



For Your Safety

Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.